

The TERP-DE product family consists of coaxial loads supporting an operational frequency band from 698MHz up to 3800MHz. The products are ideally suited for termination of unused ports in distributed antenna systems or in RADIAFLEX® radiating cables systems. The loads feature an outstanding PIM performance to avoid interferences in 3G / 4G / 5G communication systems.

**FEATURES / BENEFITS**

- Wideband coaxial load supporting all wireless services in the frequency band 698-3800MHz
- Ideally suited for 2G / 3G / 4G / 5G wireless communication networks
- PIM optimized design to avoid network interferences
- 7/16 female interface

**Technical features**

**GENERAL SPECIFICATIONS**

|                    |  |        |
|--------------------|--|--------|
| Product Type       |  | Load   |
| Techn. Application |  | Indoor |

**ELECTRICAL SPECIFICATIONS**


|                             |         |                     |
|-----------------------------|---------|---------------------|
| Frequency Range             | MHz     | 698 - 3800          |
| Impedance                   | Ohm     | 50                  |
| Intermodulation (IM3)       |         | -160dBc @ 2 x 43dBm |
| Max. VSWR / Return Loss, dB | VSWR/dB | /19                 |
| Total Input Power           | W       | 100                 |

**MECHANICAL SPECIFICATIONS**

|                      |         |               |
|----------------------|---------|---------------|
| Input Connector Type |         | 7/16 female   |
| Height               | mm (in) | 109 (4.29)    |
| Width                | mm (in) | 100 (3.94)    |
| Length               | mm (in) | 304.2 (11.98) |

**TEMPERATURE SPECIFICATIONS**

|                     |         |                        |
|---------------------|---------|------------------------|
| Temperature Range   | °C (°F) | -25 to 65 (-13 to 149) |
| Environmental Class |         | Indoor                 |

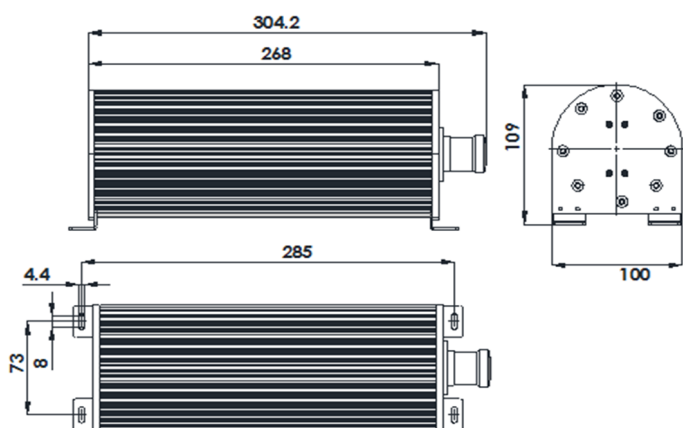

[External Document Links](#)

**Notes**

Derated power by -1.5%/°C above 50°C